

**GPX Series Gang
Jacks Right Angle and
Perpendicular PCB Mount**

Features   

- Available in 6 and 8 Position Housings
- Available in Both Right Angle and Top Entry Versions
- Ribbed Pin Guides
- Metal Locking Brackets
- UL Recognized File No. E134345
- CSA/NRTL Certified File No. LR78160

Performance Specifications

Materials and Finish

Housing Material
Thermoplastic, UL 94V-0 Rated, Gray Color
Contact Material
Phosphor Bronze

Electrical Characteristics

Insulation Resistance
500 Megohms Min
Dielectric Withstanding Voltage
1000V AC RMS for 1 Minute
Contact Resistance
20 Milliohms Max
Current Rating
1.5 Amps


MODULAR JACKS AND PLUGS

GPX Series

Documentation & Ordering Information

Kycon Part #		

Part Number Builder

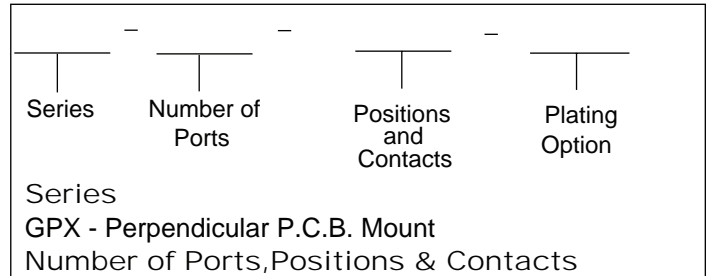



No. of Port	No. of Positions & Contacts			
	1	2	3	4
1	-	-	-	88
2	62	64	66	88
3	62	64	66	88
4	62	64	66	88
5	62	64	66	-
6	62	64	66	-
7	62	64	66	-
8	62	64	66	-

Plating Option

Designator	Plating Description
Standard	Contacts are Plated with 0.0001 Nickel, Selective Plating 0.000015 Gold on Contact Area
50	Contacts are Plated with 0.0001 Nickel, Selective Plating 0.000050 Gold on Contact Area to Comply With FCC Requirements Under #47 C.F.R. Part 68 Subpart F

GPX Series Dimensions

Dimensions in mm [In]

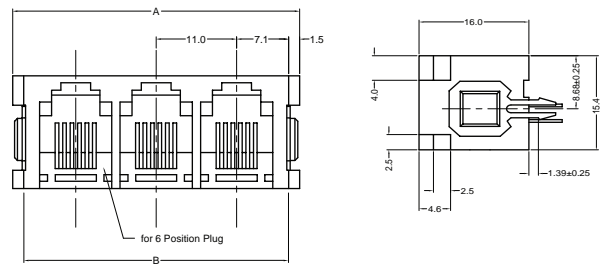

Dimensions (mm)	Number of Ports							
	2	3	4	5	6	7	8	
A	28.2	39.2	50.2	61.2	72.2	83.2	94.2	
B	25.0	36.0	47.0	58.0	69.0	80.0	91.0	

[Click here for GPX Part # list](#)