


D-SUBMINIATURE CONNECTORS:
K42X Series
Triple D-Sub Combo

K42X-25/9-9-A4N Dimensions
 Dimensions in mm

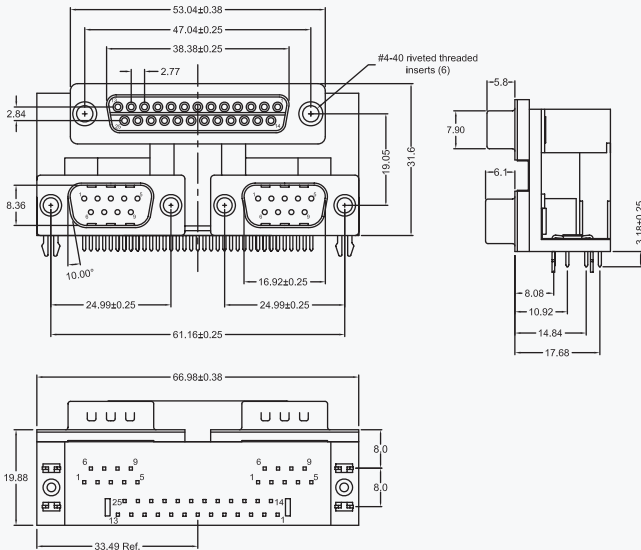

2D Drawing	IGES	STEP	3D PDF
Solder Profile	CofC RoHS Compliant	CofC REACH Compliant	UL Plastic File
Certificate of Origin	Check Stock	Request a Sample	Send Us An Email

Generated Part Number

Part Number Builder

<input type="text"/>	-	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
Series		Top Shell Size	Bottom Shell Size	Left Shell Size	Center Distance	Boardlock Option	Jackscrews Option

Series

K42X - Triple-Port D-Subminiature Connector

Top/Bottom, Left/Bottom, and Right Shell Size

- 25/9-9 - 25S over 9P and 9P
- 25/9-15 - 25S over 9P and 15S
- 25/15-9 - 25S over 15S and 9P
- 25/15-9S - 25S over 15S and 9S

Center to Center Distance

A - 0.750" (Standard)

Boardlocks Option

4N - Boardlocks (Standard)

Jackscrews Option

- Blank - No Jackscrews
- J - #4-40 Jackscrews Installed

Contact Kycon for Other Options