



DETAIL A

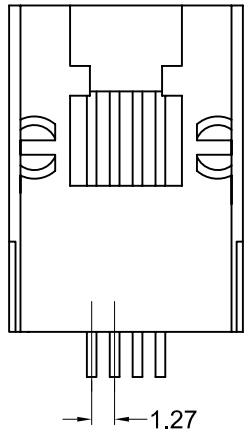

Recommended PCB Layout
(Top View)

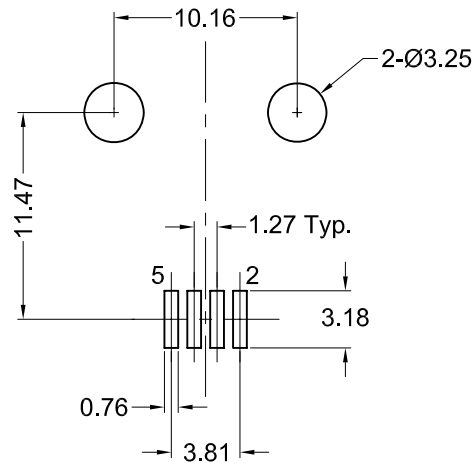

Materials and Finish

Housing Material:
high temp. thermoplastic,
(reflow process compatible)
UL 94V-0 rated, black color

Design meets UL 1863 Sec. 8
Electrical Probe and Sec. 20
Child Finger test requirements

Contact Material: phosphor bronze

Contact Plating Options:
Standard: 0.0001" Nickel
Plating, Selective Plating
Gold Flash on Contact
Area, Tin on Termination End
50: 0.0001" Nickel Plating,
Selective Plating 0.000050"
Gold on Contact Area to
Comply with FCC Requirements
Under No. 47 C.F.R. Part 68,
Subpart F, Tin on Termination End

Electrical Characteristics

Current Rating: 1.0 Amps

Current Voltage: 125V DC

Insulation Resistance:
500 Megohms min.

Dielectric Withstanding Voltage:
1000V rms, 60Hz

Contact Resistance:
20 milliohms max.

Durability Rating:
1000 mating cycles min.

Operating Temperature:
-40°C to +85°C

Part Number	Gold Plating	Packaging
GMX-SMT2-N-64	Flash	Bulk
GMX-SMT2-N-64-50	50u"	Bulk
GMX-SMT2-N-64-TR	Flash	Tape & Reel
GMX-SMT2-N-64-50TR	50u"	Tape & Reel



Tolerances
X.X ± 0.38
X.XX ± 0.25
Unless Stated Otherwise

REV.	DATE	DESCRIPTION	REV. BY	CHK. BY	DRAWN BY	DATE
A1	6/30/05	New Drawing	R. Aguirre	H. MA	R. Aguirre	05/23/05
A2	04/27/10	ECO #10-020	S. Vien	H. MA		
A3	12/08/10	ECO #10-088	S. Vien	H. MA		
					UNITS	
					mm	

GMX-SMT2-N-64

Right Angle Modular Jack, RoHS Compliant

6 Position, 4 Contacts, Surface Mount

